
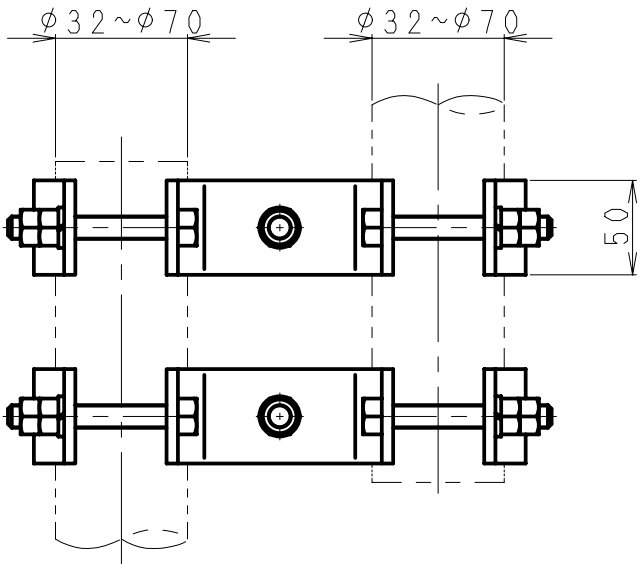


	1	2	3	4	5	6
呼び寸法 RANGE	許 容 差 の 区 分 COMMON TOLERANCE					
≤ 10	±0.1	±0.2	±0.4	±0.6	±0.8	±1.0
≤ 25	±0.15	±0.3	±0.6	±0.9	±1.2	±1.5
≤ 80	±0.25	±0.5	±1.0	±1.5	±2.0	±2.5
≤ 250	±0.4	±0.8	±1.5	±2.0	±2.5	±3.0
≤ 1000	±1.0	±2.0	±3.0	±4.0	±5.0	±6.0

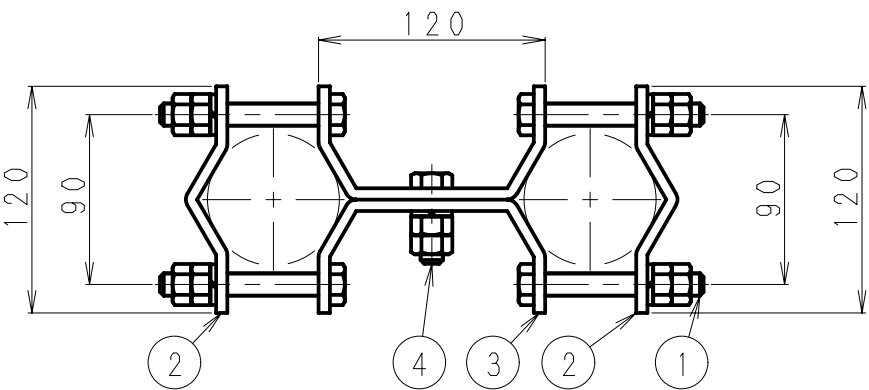

金具は2台で1組
1台あたりの質量 約1.9kg
最大受風面積 0.01m²

△				部 番 ITEM	名 称 DESCRIPTION	個 数 QUANTITY	材 質・処 理 MATERIAL TREATMENT	部 品 図 番 PART DRAWING No.	備 考 NOTE
△				4	六角ボルト M12×40	2	鋼 材・熔融亜鉛めっき		
△				3	支持板	4	鋼 材・熔融亜鉛めっき		t=6
△				2	固定板	4	鋼 材・熔融亜鉛めっき		t=6
△				1	六角ボルト M12×90	8	鋼 材・熔融亜鉛めっき		
△				SCALE 1:4					
△				DESIGNED 山本					
△				DRAWN 小川					
△				INSPECTED 奥川					
△				APPROVED 牧野					
△				単 位 DIM m・m					
△				質 量 MASS					
△				MICRO CADAM					
△				品 名 DESCRIPTION B-3-1型取付金具					
△				図 号 DRAWING No. FM-K101-H01					
△				日本アンテナ株式会社 NIPPON ANTENNA CO., LTD.					
△				符 号 DATE 変 更 記 事 REVISION RECORD 担 当 DESI GNE 承認 APPR OVED					